

HEAT BARRIER

Floor & Tunnel Shield II™


Floor & Tunnel Shield II is a superior alternative to traditional metal thermal shields. High-performance materials used in this product include an embossed 10 mil aluminum sheet bonded to a mechanically needle-punched high temperature resistant fiber composite spacer. Capable of withstanding direct heat up to 1750°F, Floor & Tunnel Shield II is backed with a super-aggressive presure-sensitive adhesive for attachment.

- Ideal for firewall, under-vehicle, floor pans, oil tank box areas, transmission tunnels, wrapping fuel cells, under hoods & more
- Blocks radiant heat from entering driver compartment
- Withstands direct high heat temperatures up to 1750°F
- Serves as a barrier to unwanted road, tire & engine noise
- Constructed from 10 mil aluminum bonded to a finely woven layer of high temperature resistant glass fiber
- Minimum clearance required
- Aggressive self-adhesive backing holds past 450°F
- Wind & water will not affect adhesion
- Easy to form to shapes & contours
- Trim, peel & stick
- Adheres to almost any surface or material including fiberglass




Available in Aluminum or black finish

Under vehicle near exhaust

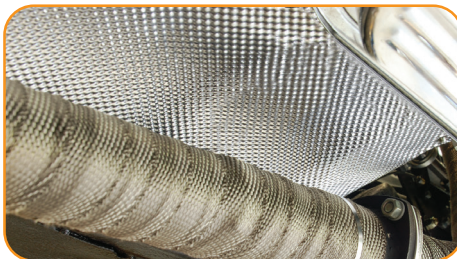

Firewalls

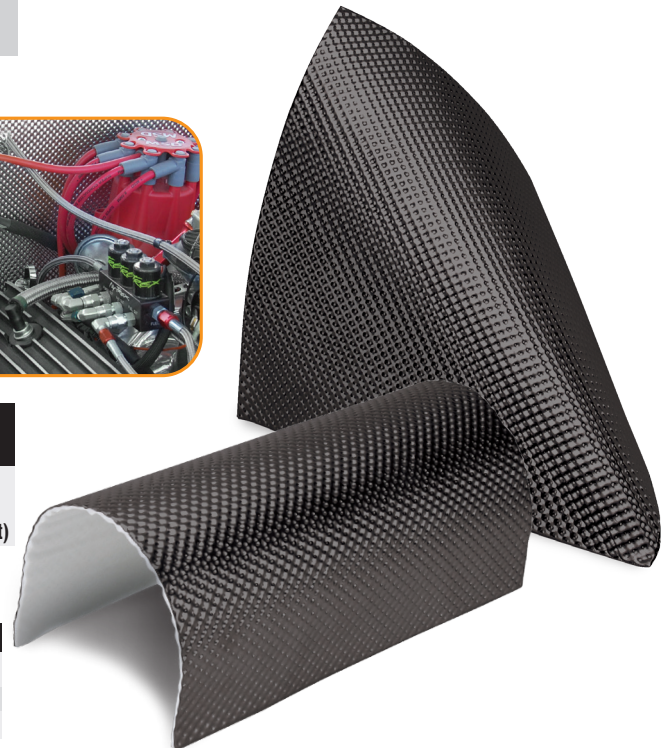

FLOOR & TUNNELS SHIELD II W/ ADHESIVE BACKING

Part #	Description
050501	21" x 2 ft (3.5 sq ft)
050502	21" x 4 ft (7.0 sq ft)
050503	42" x 4 ft (14.0 sq ft)
050503-16	10" X 10" (.83 sq ft)

FLOOR & TUNNELS SHIELD II W/O ADHESIVE BACKING

Part #	Description
050506	42" x 24" W/O Adhesive (7 sq ft)
050520	42" x 48" W/O Adhesive (14 sq ft)

BLACK FLOOR & TUNNEL SHIELD II

Part #	Description
50549	42" x 48" Black Floor & Tunnel Shield (14 sq ft)
50552	21" x 48" Black Floor & Tunnel Shield (7 sq ft)

FOR MORE INFORMATION AND OUR COMPLETE PRODUCT LINE GO TO

DesignEngineering.com



604 Moore Rd. Avon Lake, Ohio 44012

800-264-9472 • 440-930-7940

sales@designengineering.com